

Specification of Thermoelectric Module

TEC1-12408CH4.7

Description

The 124 couples, 40 mm × 40 mm size module is a single stage module which is made of our high performance ingot to achieve superior cooling performance and 70 °C or larger delta Tmax, is designed for superior cooling and heating up applications. Beyond the standard below, we can design and manufacture the custom made module according to your special requirements.

Features

- No moving parts, no noise, and solid-state
- Compact structure, small in size, light in weight
- Environmental friendly
- RoHS compliant
- Precise temperature control
- Exceptionally reliable in quality, high performance

Application


- Food and beverage service refrigerator
- Portable cooler box for cars
- Liquid cooling
- Temperature stabilizer
- CPU cooler and scientific instrument
- Photonic and medical systems

Performance Specification Sheet

Th (°C)	27	50	Hot side temperature at environment: dry air, N ₂
DT _{max} (°C)	70	79	Temperature Difference between cold and hot side of the module when cooling capacity is zero at cold side
U _{max} (Voltage)	15.6	16.8	Voltage applied to the module at DT _{max}
I _{max} (Amps)	8	8	DC current through the modules at DT _{max}
Q _{Cmax} (Watts)	78.3	85.5	Cooling capacity at cold side of the module under DT=0 °C
AC resistance (Ohms)	1.5	1.65	The module resistance is tested under AC
Tolerance (%)	± 10		For thermal and electricity parameters

Geometric Characteristics

Dimensions in millimeters

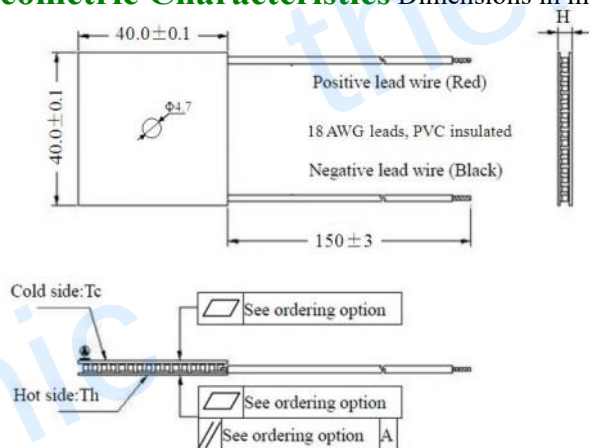

Manufacturing Options

A. Solder:

1. T100: BiSn (T_{melt}=138°C)
2. T200: CuAgSn (T_{melt} = 217°C)
3. T240: SbSn (T_{melt} = 240°C)

B. Sealant:

1. NS: No sealing (Standard)
2. SS: Silicone sealant
3. EPS: Epoxy sealant

C. Ceramics:

1. Alumina (Al₂O₃, white 96%)
2. Aluminum Nitride (AlN)


D. Ceramics Surface Options:

1. Blank ceramics (not metalized)
2. Metalized

Ordering Option

Suffix	Thickness H / (mm)	Flatness/ Parallelism (mm)	Lead wire length (mm) Standard/Optional length
TF	0:3.3±0.1	0:0.08/0.08	150±3/Specify
TF	1:3.3±0.03	1:0.03/0.03	150±3/Specify
Eg. TF01: Thickness 3.3±0.1(mm) and Flatness 0.03/0.03(mm)			

Naming for the Module






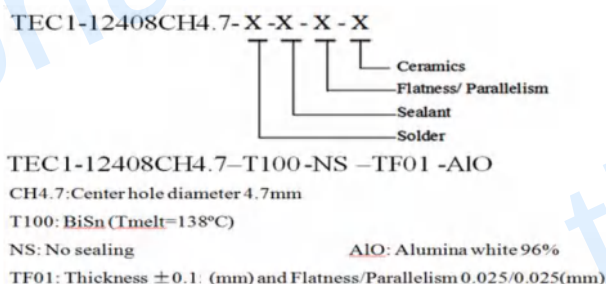


Creative technology with fine manufacturing processes provides you the reliable and quality products.

Tel: +86-791-88198288 Fax: +86-791-88198308 Email: sales@thermonamic.com.cn Web Site: www.thermonamic.com.cn

Specification of Thermoelectric Module

TEC1-12408CH4.7

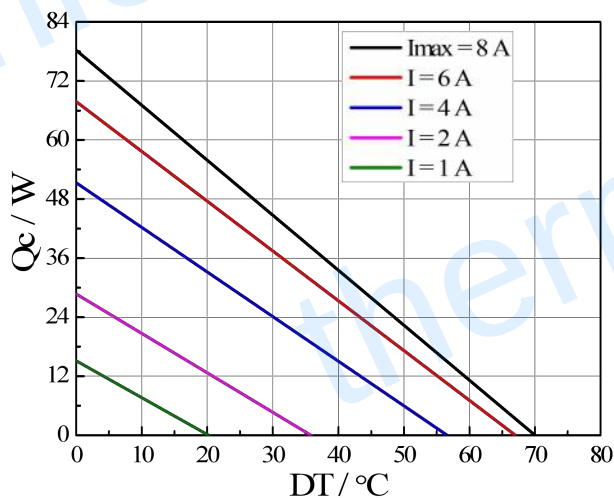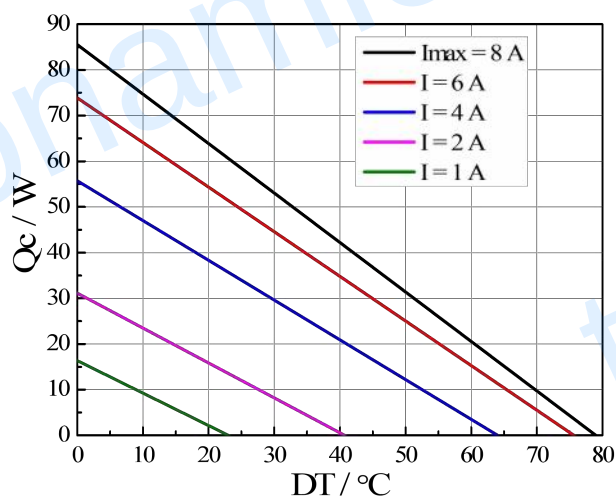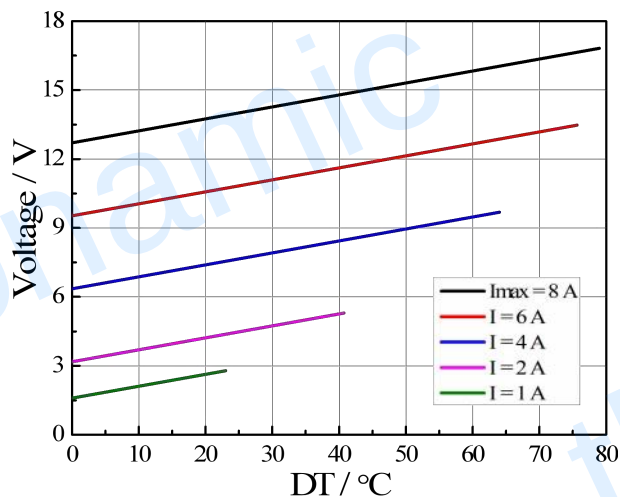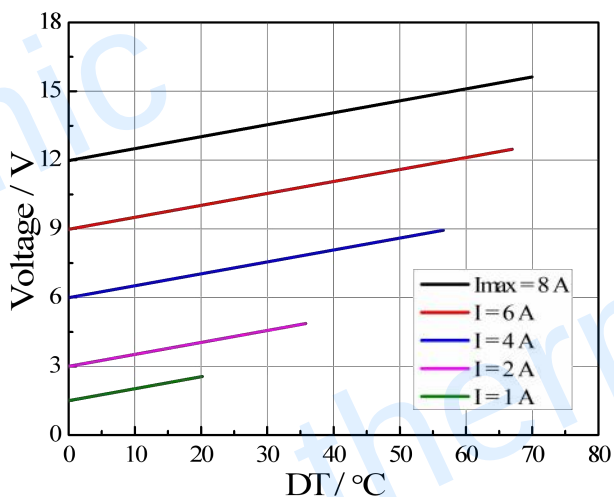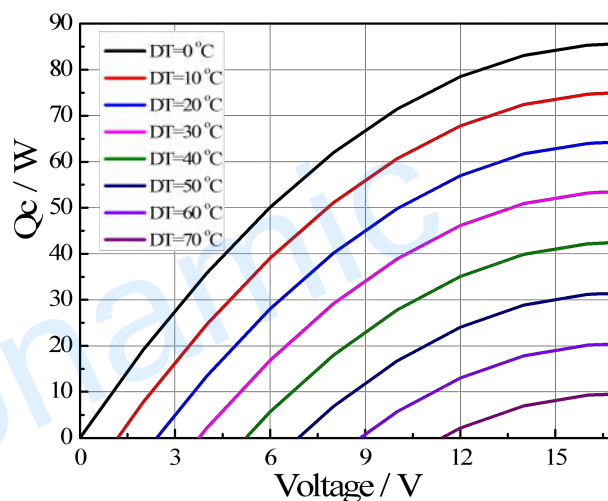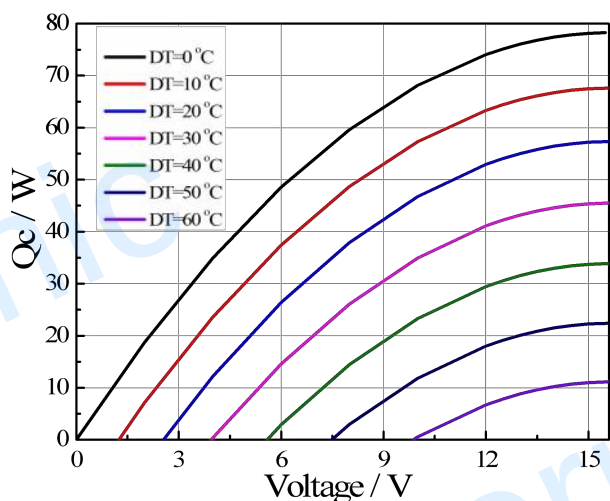Performance Curves at $T_h=27^\circ\text{C}$ Performance Curves at $T_h=50^\circ\text{C}$ Standard Performance Graph $Q_c = f(DT)$ Standard Performance Graph $V = f(DT)$ Standard Performance Graph $Q_c = f(V)$


Creative technology with fine manufacturing processes provides you the reliable and quality products.

Tel: +86-791-88198288 Fax: +86-791-88198308 Email: sales@thermonamic.com.cn Web Site: www.thermonamic.com.cn


Specification of Thermoelectric Module

TEC1-12408CH4.7



Performance Curves at $T_h=27^\circ\text{C}$

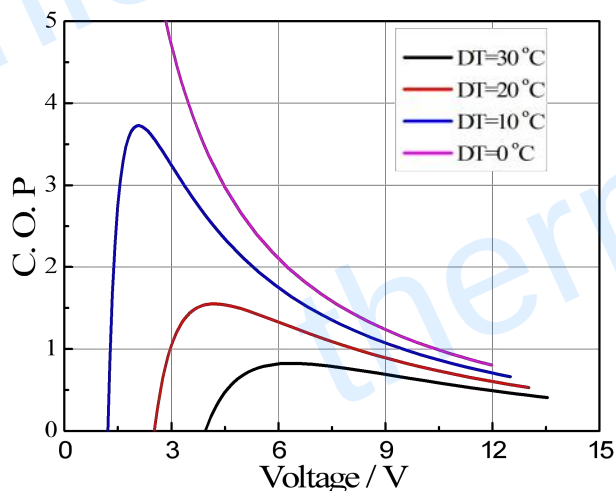

Performance Curves at $T_h=50^\circ\text{C}$

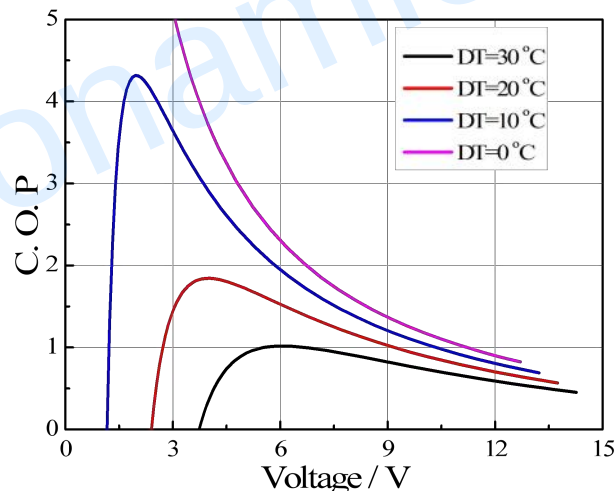

Standard Performance Graph COP = f(V) of DT ranged from 0 to 30 °C

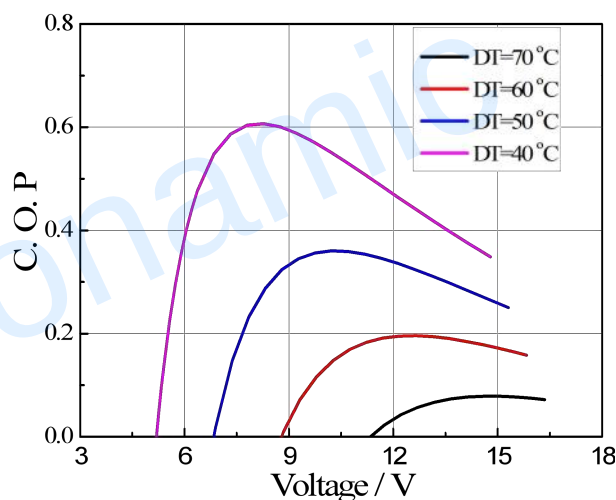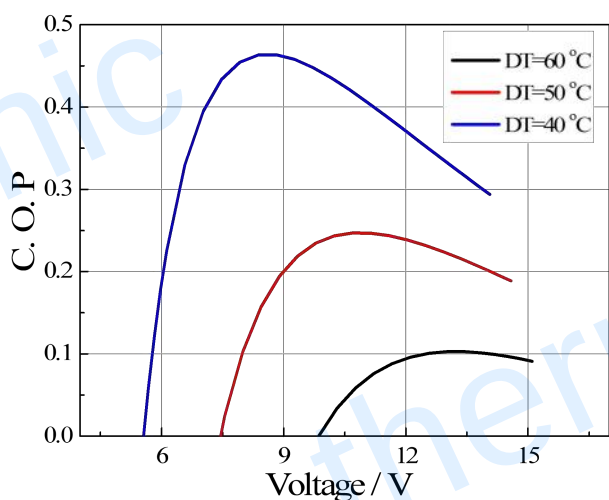

Standard Performance Graph COP = f(V) of DT ranged from 40 to 60/70 °C

Remark: The coefficient of performance (COP) is the cooling power Q_c /Input power ($V \times I$).

Operation Cautions

- Attach the cold side of module to the object to be cooled
- Attach the hot side of module to a heat radiator for heat dissipating
- Operation below $I_{\max}$ or $V_{\max}$
- Work under DC