

Specification of Thermoelectric Module

TES1-06330

Description

The 63 couples, 30mm x 15mm size module is a single stage module which is made of our high performance ingot to achieve superior cooling performance and 70°C or larger delta Tmax, is designed for superior cooling and heating applications. Beyond the standard below, we can design and manufacture the custom made module according to your special requirements.

Features

- No moving parts, no noise, and solid-state
- Compact structure, small in size, light in weight
- Environmental friendly
- RoHS compliant
- Precise temperature control
- Exceptionally reliable in quality, high performance


Application

- Food and beverage service refrigerator
- Portable cooler box for cars
- Liquid cooling
- Temperature stabilizer
- CPU cooler and scientific instrument
- Photonic and medical systems

Performance Specification Sheet

Th (°C)	27	50	Hot side temperature at environment: dry air, N ₂
DT _{max} (°C)	70	79	Temperature Difference between cold and hot side of the module when cooling capacity is zero at cold side
U _{max} (Voltage)	7.9	8.5	Voltage applied to the module at DT _{max}
I _{max} (Amps)	3.0	3.0	DC current through the modules at DT _{max}
Q _{Cmax} (Watts)	15.1	16.2	Cooling capacity at cold side of the module under DT=0 °C
AC resistance (Ohms)	2.0	2.2	The module resistance is tested under AC
Tolerance (%)	± 10		For thermal and electricity parameters

Geometric Characteristics Dimensions in millimeters

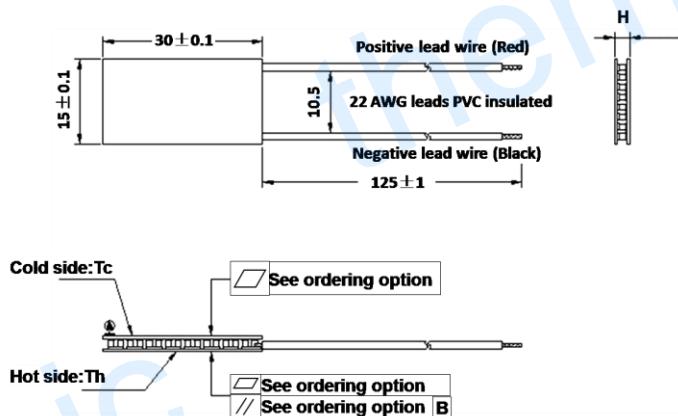

Manufacturing Options

A. Solder:

1. T100: BiSn (T_{melt}=138°C)

B. Sealant:

1. NS: No sealing (Standard)

2. T200: CuAgSn (T_{melt} = 217°C)

2. SS: Silicone sealant

3. T240: SbSn (T_{melt} = 240°C)

3. EPS: Epoxy sealant

C. Ceramics:

1. Alumina (Al₂O₃, white 96%)

D. Ceramics Surface Options:

2. Aluminum Nitride (AlN)

1. Blank ceramics (not metalized)

2. Metalized


Ordering Option

Suffix	Thickness H (mm)	Flatness/ Parallelism (mm)	Lead wire length(mm) Standard/Optional length
TF	0:3.5± 0.1	0: 0.07/0.07	125±1/Specify
TF	1:3.5 ± 0.03	1: 0.025/0.025	125±1/Specify

Eg. TF01: Thickness 3.6± 0.1 (mm) and Flatness 0.025/0.025 (mm)

Naming for the Module

TES1-06330- X -X - X - X



TES1-06330-T100-NS-TF01-ALO







T100: BiSn(T_{melt}=138°C)

NS: No sealing

ALO: Alumina white 96%

Specification of Thermoelectric Module


TES1-06330

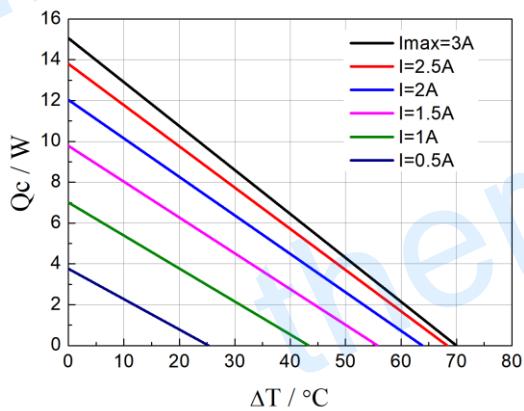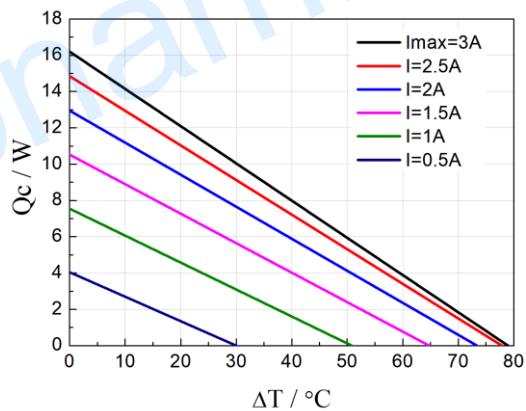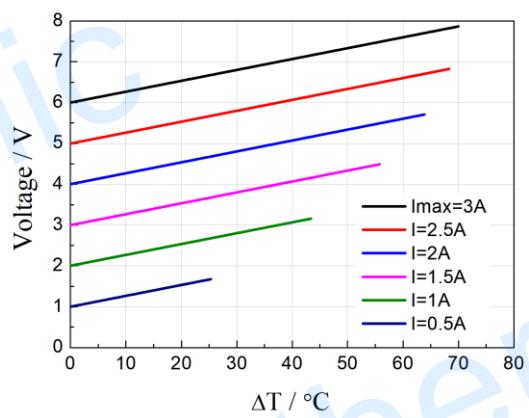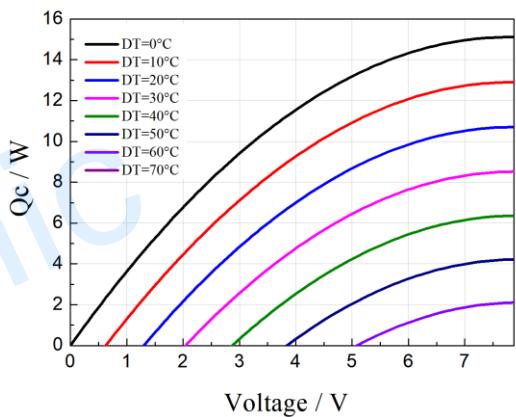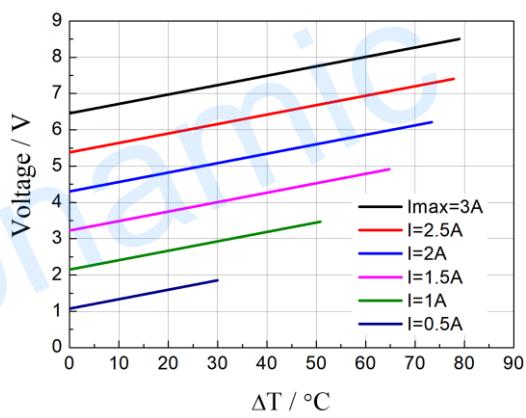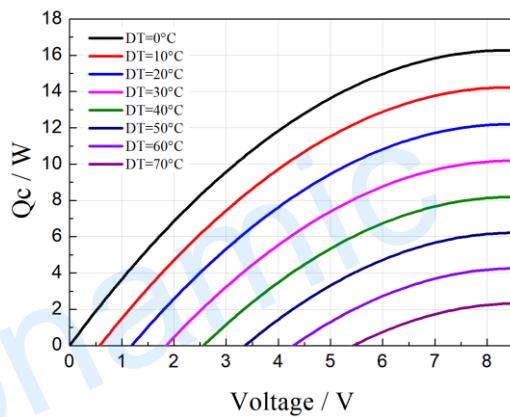Performance Curves at $Th=27\text{ }^{\circ}\text{C}$ Standard Performance Graph $Qc = f(DT)$ Performance Curves at $Th=50\text{ }^{\circ}\text{C}$ Standard Performance Graph $V = f(DT)$ Standard Performance Graph $Qc = f(V)$ 


Specification of Thermoelectric Module

TES1-06330



Performance Curves at Th=27 °C

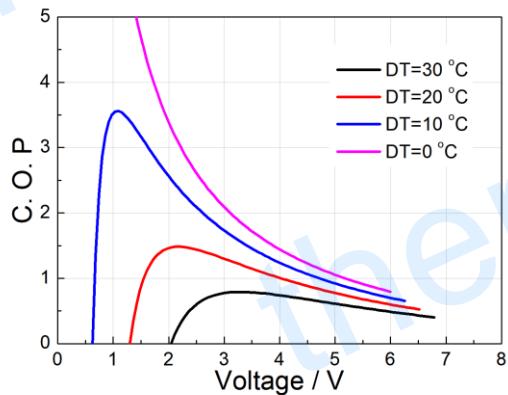

Performance Curves at Th=50 °C

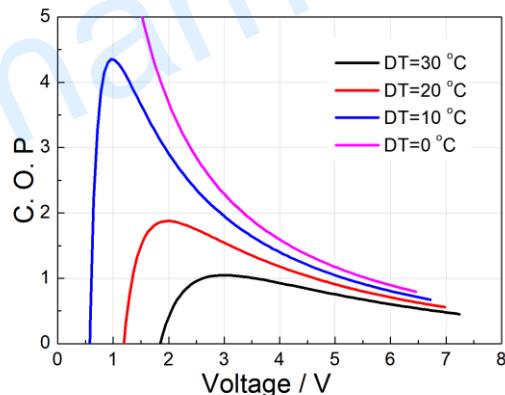

Standard Performance Graph COP = f(V) of DT ranged from 0 to 30 °C

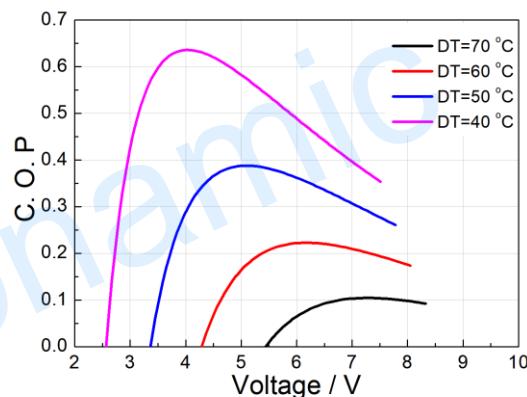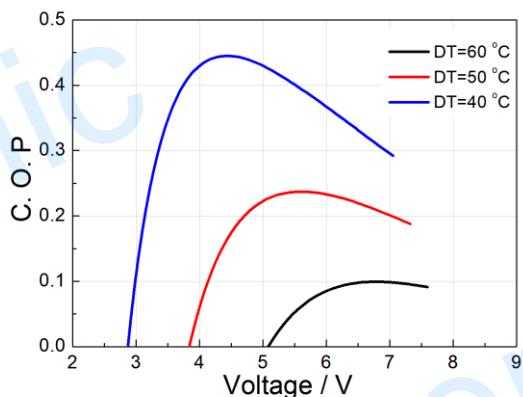

Standard Performance Graph COP = f(V) of DT ranged from 40 to 60/70 °C

Remark: The coefficient of performance (COP) is the cooling power Q_c /Input power ($V \times I$).

Operation Caution

- Attach the cold side of module to the object to be cooled
- Attach the hot side of module to a heat radiator for heat dissipating
- Operation below I_{max} or V_{max}
- Work under DC

Note: All specifications subject to change without notice.